

TUNG-SOL

TWIN TRIODE

MINIATURE TYPE


COATED UNIPOTENTIAL CATHODE

HEATER


SERIES	PARALLEL
12.6 VOLTS	6.3 VOLTS
0.15 AMP.	0.3 AMP.

AC OR DC

FOR 12.6 VOLT OPERATION APPLY HEATER VOLTAGE BETWEEN PINS #4 AND #5. FOR 6.3 VOLT OPERATION APPLY HEATER VOLTAGE BETWEEN PIN #9 AND PINS #4 AND #5 CONNECTED TOGETHER.

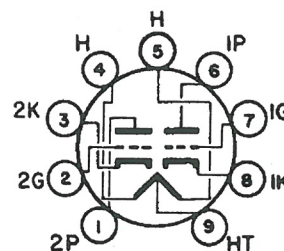

**BOTTOM VIEW
BASING DIAGRAM
JEDEC 9A**

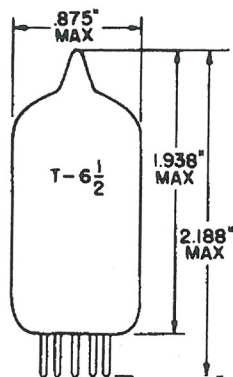

**GLASS BULB
SMALL BUTTON
9 PIN BASE E9-1
OUTLINE DRAWING
JEDEC 6-2**

THE 12AU7 COMBINES TWO INDEPENDENT MEDIUM- μ INDIRECTLY HEATED CATHODE TYPE TRIODES IN THE SMALL 9 PIN BUTTON CONSTRUCTION. IT IS ADAPTABLE TO APPLICATION EITHER AS AN AUDIO FREQUENCY AMPLIFIER OR AS COMBINED OSCILLATOR AND MIXER.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
TRIODE UNIT 1			
GRID TO PLATE: (G TO P)	1.5	1.5	pf
INPUT: G TO (H+K)	1.8	1.6	pf
OUTPUT: P TO (H+K)	2.0	0.40	pf
TRIODE UNIT 2			
GRID TO PLATE: (G TO P)	1.5	1.5	pf
INPUT: G TO (H+K)	1.8	1.6	pf
OUTPUT: P TO (H+K)	2.0	0.32	pf

^AEXTERNAL SHIELD #315 CONNECTED TO CATHODE OF UNIT UNDER TEST.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

EACH TRIODE UNIT

	CLASS A ₁ ^B AMPLIFIER	VERTICAL ^B DEFLECTION AMPLIFIER	
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE:			
TOTAL DC AND PEAK	200	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE:			
DC	100	100	VOLTS
TOTAL DC AND PEAK	200	200	VOLTS
MAXIMUM PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PEAK POSITIVE PLATE VOLTAGE (ABSOLUTE MAXIMUM)	---	1200	VOLTS
MAXIMUM PLATE DISSIPATION: ^C			
EACH PLATE	2.75	2.75	WATTS
BOTH PLATES	5.5	5.5	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	---	250	VOLTS
MAXIMUM CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	---	60	MA.
MAXIMUM GRID CIRCUIT RESISTANCE			
FIXED BIAS OPERATION	0.25	---	MEGOHM
CATHODE BIAS OPERATION	1.0	2.2	MEGOHMS

^BFOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE NOT TO EXCEED 15 PERCENT OF A SCANNING CYCLE.

^CIN STAGES OPERATING WITH GRID-LEAK BIAS, AN ADEQUATE CATHODE BIAS RESISTOR OR OTHER SUITABLE MEANS IS REQUIRED TO PROTECT THE TUBE IN THE ABSENCE OF EXCITATION.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS (CONT'D)

EACH TRIODE UNIT



	VERTICAL ^D DEFLECTION OSCILLATOR	HORIZONTAL ^D DEFLECTION OSCILLATOR	
MAXIMUM HEATER-CATHODE VOLTAGE:			
HEATER NEGATIVE WITH RESPECT TO CATHODE:			
TOTAL DC AND PEAK	200	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE:			
DC	100	100	VOLTS
TOTAL DC AND PEAK	200	200	VOLTS
MAXIMUM DC PLATE VOLTAGE	300	300	VOLTS
MAXIMUM PLATE DISSIPATION:			
EACH PLATE	2.75	2.75	WATTS
BOTH PLATES	5.5	5.5	WATTS
MAXIMUM PEAK NEGATIVE GRID VOLTAGE	400	600	VOLTS
MAXIMUM AVERAGE CATHODE CURRENT	20	20	MA.
MAXIMUM PEAK CATHODE CURRENT	60	300	MA.
MAXIMUM GRID CIRCUIT RESISTANCE	2.2	2.2	MEG OHMS

^D FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE NOT TO EXCEED 15 PERCENT OF A SCANNING CYCLE.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER - EACH TRIODE UNIT

PLATE VOLTAGE	100	250	VOLTS
GRID VOLTAGE	0	-8.5	VOLTS
PLATE CURRENT	11.8	10.5	MA.
PLATE RESISTANCE (APPROX.)	6 500	7 700	OHMS
TRANSCONDUCTANCE	3 100	2 200	μMHOS
AMPLIFICATION FACTOR	20	17	
GRID VOLTAGE FOR I _b = 10 μA. (APPROX.)	---	- 24	VOLTS

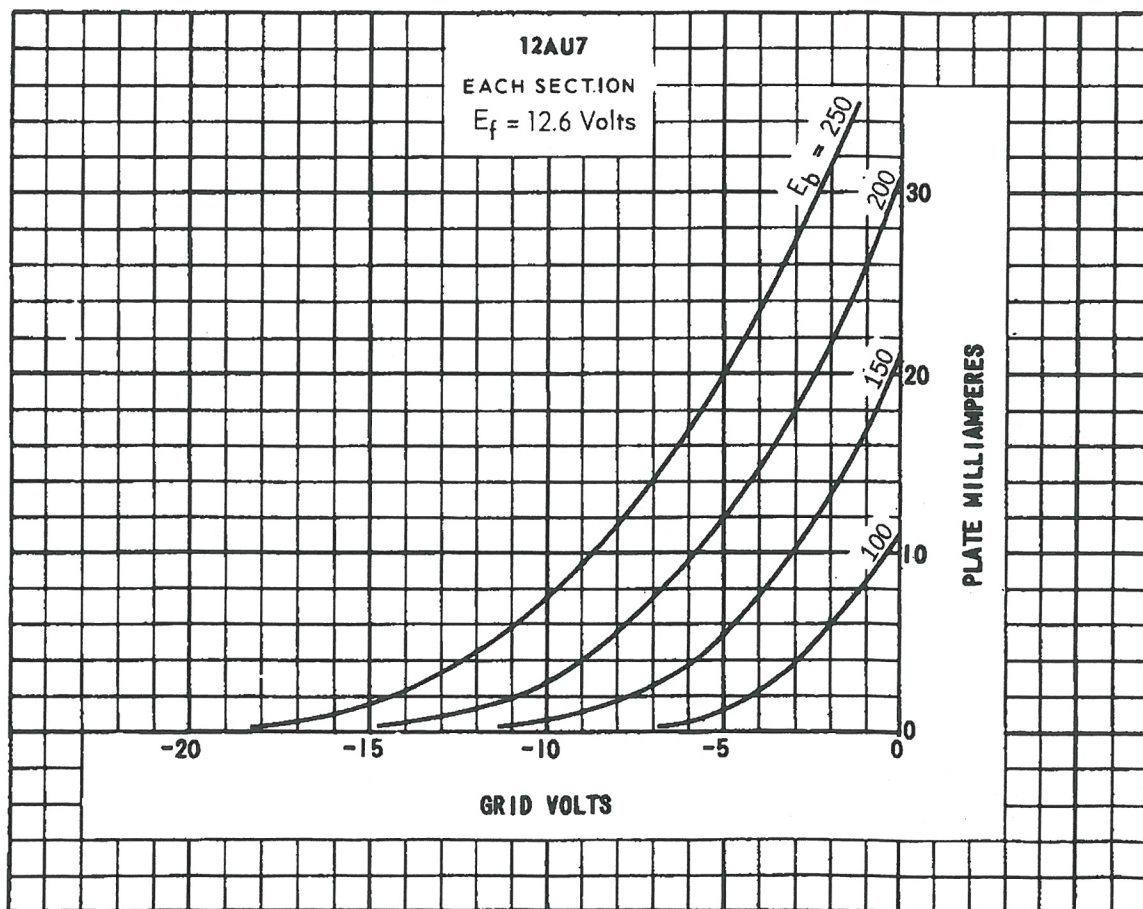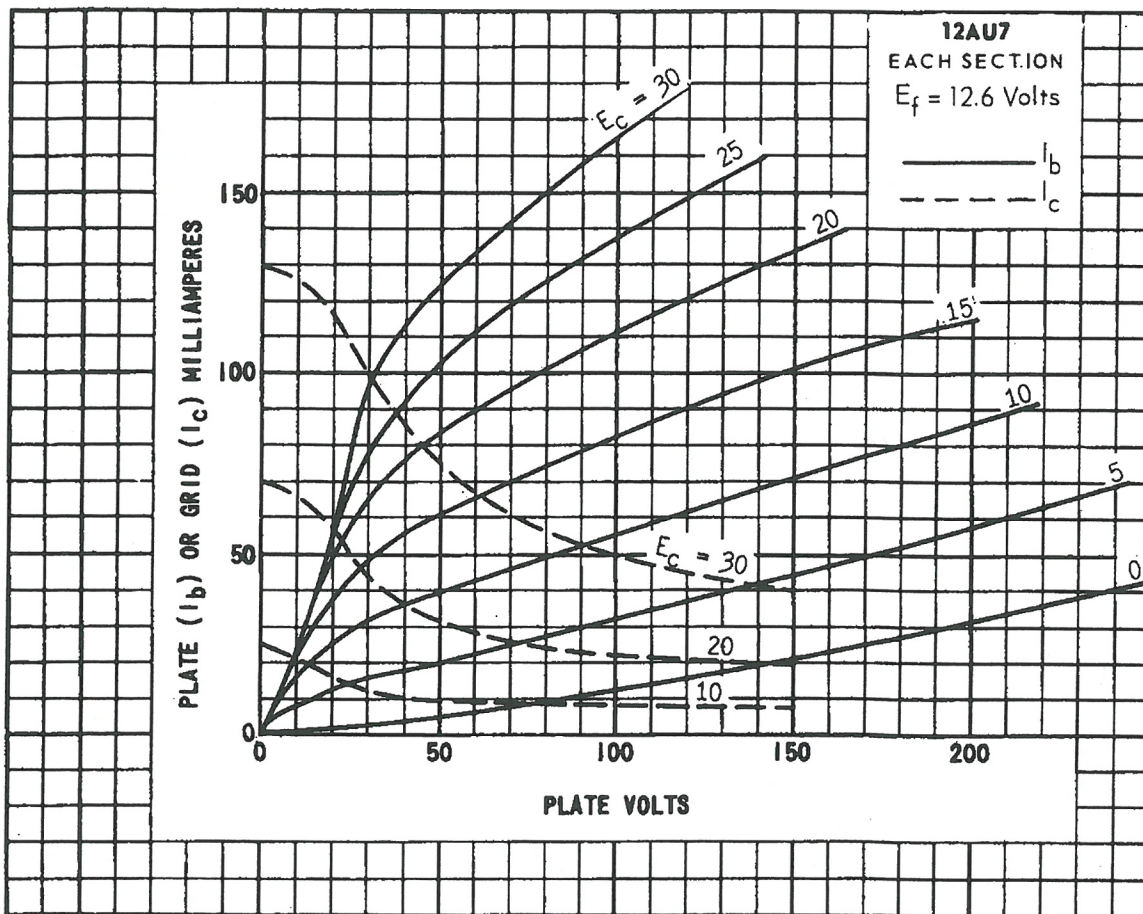

12AU7

